



Rechargeable

# LED Bluetooth Worklight

## 20W


## Instructions

INTRODUCTION


A compact energy-efficient light that provides a powerful 2000 lumen light output for a range of working conditions. With 5 output modes the light brightness can be easily selected to suit the working environment, providing up to 8 hours run time.

Bluetooth speaker allows compatible devices to be connected, enabling music to be played anywhere. Magnetic feet and ratcheting stand allows the light to be placed in a range of locations. A four LED display on the back of the torch displays remaining power. The light can also be used as a powerbank to charge devices such as mobile phones.

DIAGRAM

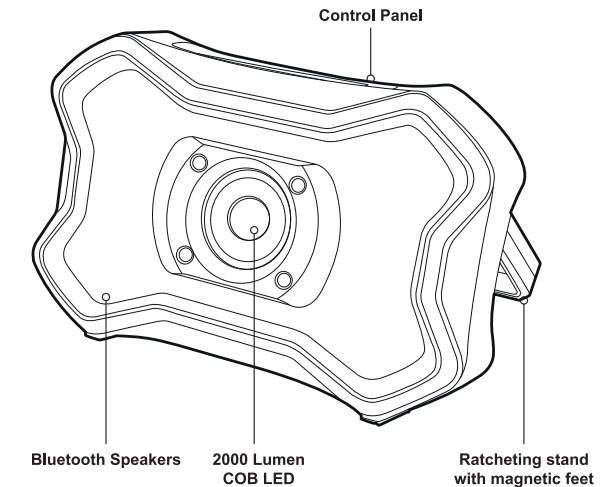

CONTROL PANEL

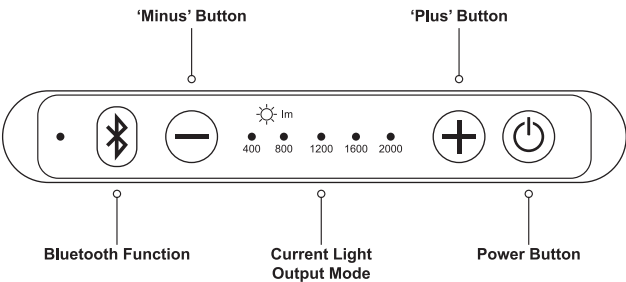

Specifications FPP SLFF20BS

Mode	100%	80%	60%	40%	20%
Lumens	2000	1600	1200	800	400
Run time	1.6h	2h	2.5h	4h	8h
Light source	20W COB LED				
Colour Range	6,000-7,000K				
Battery	Li-ion 7.3v 4000mAh				
Charge time	approx. 4 hours				
Bluetooth module	BT1213H (CSR8635 Antenna)				
Frequency response	193Hz-20KHz				
Speaker Watt	2 x 5W				
Speaker Mode	Full Frequency				
Bluetooth distance	10M				
Communication system	Bluetooth 4.0 Version				
Water resistant	IP44				
Impact resistant	1 metre				
Weight	1000g				
Dimensions	139 x 212 x 65mm				
Supplied with	240V Charger				

OPERATING INSTRUCTIONS

To operate the light:

- Hold down the power button "⏻" for 3 seconds to turn on full power.
- Use the "+" and "-" buttons to increase or decrease the brightness level. The LED display on the top of the light shows the selected output of lumens.
- Hold down the power button "⏻" for 3 seconds to turn off the light.

Bluetooth speaker operation

- Press the "🔊" play button for 3 seconds to access Bluetooth.
- An audible beep will be heard.
- Set your Bluetooth device to 'Discover' the lantern speaker.
- Volume is controlled via your Bluetooth connection.
- Hold the "🔊" button down for 3 seconds to turn off Bluetooth.

Charging a device with the Powerbank Function

- Plug the USB cable into the charging port of the device to be charged.
- Plug the other end of the USB cable into the USB outlet beneath the rubber cover on the back of the light.
- Charging will commence as soon as the USB lead is connected, check that the light is switched off, to ensure that the recharge time is kept to a minimum.
- Once the attached device is fully charged, disconnect the charging lead to conserve the remaining battery power stored in the light.

NOTE:

The light can be used to recharge any device that has been supplied with a USB charging lead by it's manufacturer. Faithfull cannot be held responsible for any damage or accident caused to any device that is charged using the light as a power source.

Some mobile devices charging leads can contain authentication chips to prevent the use of third party chargers with their products.

## BATTERY RECHARGING

The light must be fully charged for a minimum of 4 hours before being used for the first time, this will ensure that the battery gives its best performance now and on future recharging cycles.

The power supply is for recharging the battery only. It cannot be used to directly power the light.

Failure to recharge the light every 3 months may permanently damage or reduce the performance of the light. The battery charge does not have to be fully depleted before recharging.

## Using the Charging Adaptor

Plug the chargers plug into the socket beneath the rubber cover on the back of the light. Plug the charger into a 240V power outlet.

While on charge the charging indicator LED will flash blue. All four LEDs will turn blue when the battery is fully charged (approximately 4 hours).

### NOTE:

For best performance Li-ion batteries should not be stored for prolonged periods without being charged at regular intervals.

It is recommended to keep the battery in a state-of-charge of 40-50 percent when placing in storage. If in doubt, keep the light in a higher charged state in a cool place.

Self-discharge rate is approximately 10% per month.

## CLEANING

Clean the light using a soft cloth dampened with a soap and water solution. Do not immerse or submerge the light in water or any other fluid.

## MAINTENANCE

There are no serviceable parts inside this light. Opening or visible attempts to repair the light will void any guarantee.

LED bulbs should not wear out under normal conditions and do not need to be replaced.

## CAUTION

**Never attempt to open a battery, as liquid may be ejected. If accidental contact occurs, flush the affected area with water. If the liquid comes into contact with the eyes, flush with water and seek medical help.**

Li-ion batteries are formulated from environmentally sensitive materials and must be disposed of properly. Please return these batteries to your local recycling centre where they will be recycled or disposed of properly.

Never attempt to incinerate batteries, as they may leak or explode.

## One Year Home Use Limited Guarantee

Faithfull guarantees this product to the original purchaser for a period of **one year** against any defects in material or workmanship but shall not cover damage caused by misuse, abuse, alteration or accident. This product is intended for home use only and the guarantee will not cover products used for commercial purposes.



### IMPORTANT SAFETY INFORMATION

It is essential that you read and understand the instructions contained in this manual before using the product for the first time. Failure to follow these instructions could result in an electrical shock or possible damage to the product.  
This manual should be stored safely for future reference.



### DISPOSAL OF THIS ARTICLE

Dear Customer,  
If you at some point intend to dispose of this article, then please keep in mind that many of its components consist of valuable materials, which can be recycled.  
Please do not dispose of this product in the household waste bin, but check with your local council for recycling facilities in your area.

#### FAITHFULL TOOLS

3 White Lodge Business Estate,  
Hall Road, Norwich, Norfolk,  
NR4 6DG, United Kingdom.

#### TUCKS O'BRIEN LTD

24 Magna Drive,  
Magna Business Park, Citywest Road,  
Dublin 24, D24 FNYO, Ireland.

