

**WARNING:** ENSURE ELECTRICITY IS ISOLATED AT THE MAINS BEFORE INSTALLATION OR SERVICING. ALWAYS USE A QUALIFIED TECHNICIAN. THIS IS A SEALED UNIT DO NOT ATTEMPT TO REPAIR.

**PLEASE READ THROUGH ALL FOLLOWING INSTRUCTIONS BEFORE ATTEMPTING TO INSTALL THE UNIT. IF IN ANY DOUBT ABOUT CORRECT INSTALLATION, PLEASE CONSULT A QUALIFIED ELECTRICIAN.**

**IMPORTANT:** This product has been designed and manufactured for use as an exterior wall mounted lamp controlled from a manually operated switch. This is not intended for any other application or use.

### Installation and Standard Wiring Instructions


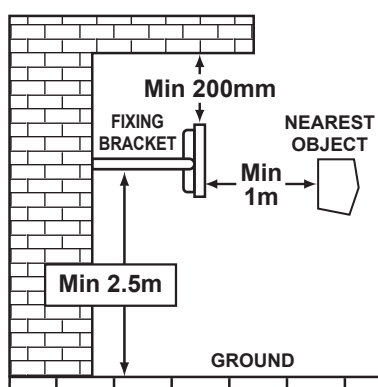


FIG. 1 Mounting position

1. Mounting position: Do not mount on a surface prone to vibrations. The floodlight should ideally be fixed with the wall fixing bracket (see Fig. 1).
2. Mark the hole positions for fixing bracket onto the wall. Drill and plug the wall at the marked positions. Screw the fixing bracket to the wall with suitable screws (not supplied) (see Fig. 2).
3. Connect the unit to a waterproof junction box. (see Fig. 3). Brown to the live terminal, Blue to the neutral terminal and green/yellow to the earth terminal.
4. Mount the unit to the wall fixing bracket by replacing the two bolts. Adjust the floodlight to desired angle and tighten the bolts.

FPPSLWM10 & FPPSLWM20

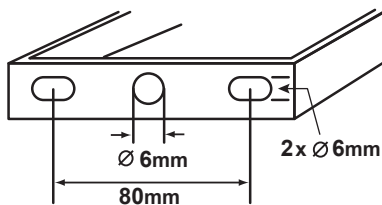

FPPSLWM30

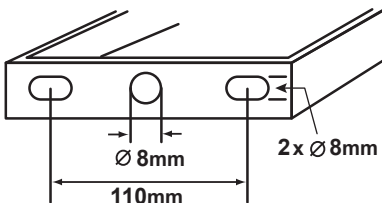


FIG. 2 Fixing holes size of bracket

### Technical Data

Model:	FPPSLWM10	FPPSLWM20	FPPSLWM30
Voltage:	220-240VAC 50Hz	220-240VAC 50Hz	220-240VAC 50Hz
Bulb:	10 Watt SMD LED	20 Watt SMD LED	30 Watt SMD LED
Waterproof:	IP65	IP65	IP65
Floodlight facade:	tempered glass	tempered glass	tempered glass
Lumens:	800LM	1600LM	2400LM
Color temperature	6500K	6500K	6500K

### Disposal

This product, accessories and packaging should be sorted for environment friendly recycling.

### Environmental Protection

Waste electrical products should not be thrown away with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.



Wiring must be connected in accordance with this diagram.

SYMBOL	(L)	(N)	(⊕)
CABLE WIRE	Brown Wire	Blue Wire	Green/Yellow Wire

FIG. 3

Connection to mains supply via an outside waterproof junction box.

### FAITHFULL TOOLS

Phoenix House,  
3 White Lodge Business Estate,  
Hall Road, Norwich,  
Norfolk, NR4 6DG

E-mail: [enquiries@faithfulltools.com](mailto:enquiries@faithfulltools.com)

[www.fairthfulltools.com](http://www.fairthfulltools.com)



Scan to view the Faithfull Tools website.