

Ratchet Tie Downs

Ratchet tie downs are manufactured from a triple layer of Terylene webbing and they are weatherproof, cut and abrasion resistant. The quick and easy to use ratchet mechanism features a cushioned thumb release and an automatic lock, ensuring that loads are secured quickly and efficiently.

This range is manufactured in accordance with EN12195-2.



Cam Buckle Tie Downs

Used in the transport and building industries and for many outdoor leisure activities. 100% polyester. Extremely hardwearing, durable and robust. Cam buckle action secures loads quickly and efficiently.

Size: **5M x 25mm**

Max working load: **100kg/daN**

Breaking strain: **200kg/daN**

Manufactured in accordance with EN12195-2.




	LENGTH	WIDTH	MAX LOAD	BREAK STRAIN	HOOK	QTY	Ex VAT	Inc VAT
FAITDRAT51SH	5M	25mm	300kg/daN	600kg/daN	S	2	£17.88	£21.46
FAITDRAT51JH	5M	32mm	660kg/daN	1320kg/daN	J	2	£48.12	£57.74
FAITDTRUCK52	5M	50mm	2000kg/daN	4000kg/daN	J	1	£36.71	£44.05
FAITDTRUCK82	8M	50mm	2000kg/daN	4000kg/daN	J	1	£43.53	£52.24

Breaking strain: The minimum load a tie down will withstand before failure.

Maximum working load: The maximum workload a tie down should be subjected to during normal use. It is recommended that the work load does not exceed one third of the rated capacity.

NEW Lifting Slings

A soft alternative to wires and chain. Manufactured from 100% high-tenacity polyester material with reinforced sleeved lifting eyes. Each sling is clearly marked with its safe working load and individually numbered for logging and traceability purposes. The minimum breaking load is seven times the working load.

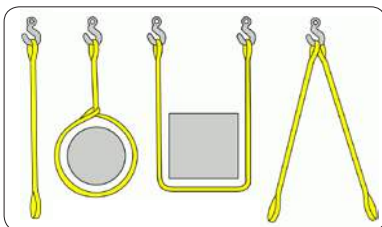

Suitable for lifting various objects using multiple lifting methods.

Length: 2M



	LENGTH	WIDTH	MAX LOAD	BREAK STRAIN	Ex VAT	Inc VAT
FAITDLS2T2M	2M	60mm	2000kg/daN	14,000kg	£15.30	£18.36
FAITDLS2T3M	3M	60mm	2000kg/daN	14,000kg	£21.83	£26.20
FAITDLS3T2M	2M	90mm	3000kg/daN	21,000kg	£22.02	£26.42
FAITDLS3T3M	3M	90mm	3000kg/daN	21,000kg	£28.14	£33.77

